ENHANCED SAFETY. LOWER COSTS.

KERAVERIN[®] PTFE-M – YOUR BENEFITS COMPARED TO CONVENTIONAL MATERIALS

- Reduced risk for employees and the environment from potential leaks
- Lower maintenance costs

- Special designs can be implemented to customer specifications
- No restrictions thanks to pipe components in a modular design


• Thanks to the full bond between the PTFE and the reinforcing laminate

LIGHTWEIGHT PIPE MATERIAL AND THE SUPPORTING STRUCTURE

• Space savings and maintenance costs compared to steel constructions

VERY GOOD EMERGENCY RUNNING PROPERTIES

MUCH LONGER SERVICE LIFE

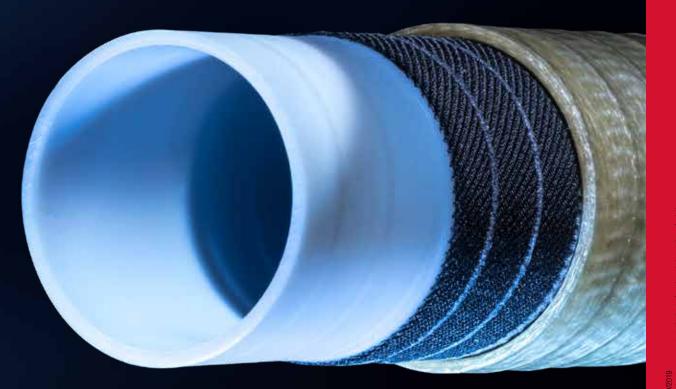

STEULER



Together with our subsidiaries and representatives, Steuler offers a worldwide network to our clients that develops and implements comprehensive system

Alphaplast, S.L.U.

CIMA S.r.I. Italy

Ditescor S.A. de C.V. Mexico

STEULER-KCH Polska Sp.z o.o. Poland

Shanghai STEULER-KCH Anticorrosion Engineering Co., Ltd. China

STEULER Chile SpA

STEULER-CTI N.V.

STEULER-KCH Austria GmbH Austria

STEULER-KCH France SARL France

STEULER-KCH AUSTRALIA Pty. Ltd. Australia

STEULER-KCH MAROC SARL Morocco

Steuler-KCH Nordic AB

STEULER-KCH SAUDI Co. Ltd. Kingdom of Saudi Arabia

Steuler Técnica, S.L.

TECNICAS DE REFRACTARIOS, S.A.U. (TECRESA)

STEULER-KCH GmbH

Berggarten 1 56427 Siershahn | GERMANY +49 2623 600-341 plastics@steuler-kch.com

www.steuler-linings.com

STEULER Plastic Linings

ULTIMATE COMPOSITE SYSTEM KERAVERIN® PTFE-M

MERILLEP THE REAL

The KERAVERIN® PTFE-M material system supplied by Steuler Linings is a high-performance and futureorientated solution for pipes and process equipment that makes conventional metallic structures substitutable. Thanks to the worldwide unique and patented process, especially in the piping sector, Steuler Linings has been able to laminate pipes of modified PTFE with a carbon fiber fabric under specific production conditions. In combination with the applied GRP reinforcement, a unique high-performance composite tube system is created. The resulting bond strength (bond shear strengths of up to 9 N/mm²) is so high that failure due to thermally induced stresses - different thermal expansion behaviour of liner and reinforcement material - or vacuum loading cannot occur. This enables operation even under vacuum and leads to a long service life.

UNIQUE HIGH-PERFORMANCE **COMPOSITE**

The use of various resin systems allows components to be created that can be used up to a temperature of 160 °C. A significantly improved weldability and lower permeability characterise the PTFE-M liner. The welding properties allow a noticeable reduction of flange connections and an individual pipe run – without having to meet for instance the modular dimensions of steel pipes. The leak risk is minimised and the repair and maintenance costs reduced which means improved safety for personnel and the environment, whilst also reducing operating costs.

KERAVERIN® PTFE-M stands out as the lightweight option among the tube systems: 70-80% lighter than steel tubes which reduces the need for supporting structures and assembly work.

KERAVERIN® PTFE-M has also earned itself a reputation in the process equipment engineering sector, especially for columns and reaction tanks - in almost any size or for any specifications.

- High temperature resistance up to 160°C no brittleness, no aging.
- Excellent chemical resistance; the dense polymer structure means low permeability
- Ideal for use with extremely corrosive media and at high temperatures



RY MECHANICAL DURABILITY

- High mechanical strength as well as excellent deformation and stress crack resistance with a low Stretch Void Index (SVI) – low deformation under load
- Individual moulding much better welding properties with realised welding factors at a high level

FLEXIBILITY, SAFETY AND PROFITABILITY

The liners used are suitable for hot gas welding – ideal for the production of complex geometric forms. KERAVERIN® PTFE-M by Steuler Linings is a material system that offers a long service life and a low maintenance. This means a highly cost-efficient system with a high level of reliability and durability for sustainable and safe plant operation.



